

Selection of Material Handling System for Flexible Manufacturing Cell using Hybrid Multi Attribute Decision Making Approach (A Case Study)

Sarabjit Singh

Asst. Professor

*Department of Mechanical Engineering
Chandigarh Group of Colleges ,Jhanjeri*

Kishor Kulkarni

Associate. Professor

*Department of Mechanical Engineering
Chandigarh Group of Colleges ,Jhanjeri*

Virat Saroop

Asst. Professor

*Department of Mechanical Engineering
Chandigarh Group of Colleges ,Jhanjeri*

Abstract - Manufacturing Industries need to be furnished with new and updated effective tools for rapidly changing and highly competitive nature of today's global world. Industrial Automation lead to Flexible Manufacturing Systems (FMS) that allows manufacturing systems to excel under highly customized production requirements. The right selection of material handling system on the basis of performance measuring parameters is Multi-Attribute Decision Making Approach (MADM). MADM is a method used to solve problems involving selection from a finite number of alternatives. The Highway industries limited Company is facing enormous problem of material rejection & the multiple reason for such rejection are ,outdated machinery, less skilled worker but among these the most crucial factor is lack of flexible material handling system ,which resulted in loss of profit, quality, production rate etc. The main idea behind research study is to propose a suitable material handling system for crank shaft machining line of Highway industries limited manufacturing organization by using graph theory and matrix approach (GTMA) and analytical hierarchy process (AHP) methodology. In these five different flexible manufacturing systems have been considered so as to reduce waiting time of machine, work in process (WIP), labour cost and increase in machine utilization. The unique values of numerical index value are calculated to decide the ranking among the various flexible manufacturing systems. The cost analysis of different proposed flexible manufacturing system was evaluated & compared with existing system in the organization. Results shows that the existing system may be replaced by flexible manufacturing system (FMS II) so as to decrease the labour cost and maintenance cost and to enhance quality and productivity. Among five FMS system FMS-II indicates the best results with a pay back period of five Month .

Keywords – FMS, Graph Theory and Matrix Approach (GTMA) and Analytical Hierarchy Process (AHP), Different Material Handling System.

I. INTRODUCTION AND LITERATURE REVIEW

Flexible manufacturing system (FMS) is defined as automated manufacturing system consisting of multi- functional machines interconnected by a material handling system (Jain et al., 2006). It is an important tool for increasing the production efficiency and reducing the total production time (Tashnizi et al., 2008).The reason the FMS is called 'flexible' is that it is capable of processing a variety of different part styles simultaneously at the various work stations, and the mix of part styles and quantities of production can be adjusted in response to changing demand patterns.FMS is an integrated manufacturing system that fills the gap between high-production transfer lines and


low-production NC machines. Examples of existing FMS are covered in Groover and Zimmers (2000). The design and subsequent operations of FMS is complex and time consuming, most researchers have adopted hierarchical approaches to the design and operations of FMS. The model developed for FMS analyses were reviewed by Buzacott and Yao (1982). Sarin and Wilhelm (1986) reviewed the mathematical models which address the associated planning and operational problems.

Material handling can be defined as an integrated system involving activities such as moving, handling, storing and controlling of materials by means of gravity, manually or with machinery. Material handling is an important area of concern in flexible manufacturing systems because more than 80% of time that material spends on a shop floor is spent either in waiting or in transportation, although both these activities are non-value added activities. Efficient material handling is needed for less congestion, timely delivery and reduced idle time of machines due to non-availability or accumulation of materials at workstations. Safe handling of materials is important in a plant as it reduces wastage; breakage, loss and rejection etc. The idea behind this case study shows that there is very less or little evidence on selection of material handling system by implementation of graph theory and analytical hierarchy process (AHP) available in literature. The focus of the study is on large and medium scale manufacturing enterprise of Northern India, because these are the organizations facing the problem of material rejection due to manual material handling system which resulted in lower productivity, quality & profitability. So, the present research work is a step to design flexible manufacturing system for the existing layout in the present organization.

In today's world, manufacturing system has undergone a complete change in the few decades. The manufacturing units are continuously trying to update & automate themselves by acquiring or developing new technologies. At present, the survival of Indian industries depends upon effective utilization & adaptation of new technologies. To demonstrate the methods developed by using graph theory, in order to obtain system-wise optimized solutions and to integrate manufacturing system analysis. The selection of material handling system in the design of flexible manufacturing system (FMS). The material handling system in the design of flexible manufacturing system is dependent on many factors. The multi attribute design making (MADM) models namely ANP establish the relationship that exists between and within different factors. A hypothetical case situation is considered to demonstrate the application of ANP. The ANP suggests that conveyor is better alternative for the FMS under the given hypothetical situation Anand et al. (2011). The elements constituting the manufacturing plant and the interacting between them have been identified and represented by graph model. The various sub systems constitutes the manufacturing system and their interaction have been recognized at different performance dimensions. The permanent multinomial characterize the manufacturing systems are highly useful for computational storage, retrieval, communication as well as analysis of the structural information of manufacturing system Singh and Aggarwal (2007). presents the review study of papers on graph theory and matrix approach. The potentiality of graph theory and matrix approach is proven in the failure mode and effect analysis and optimization of manufacturing system and processes. This paper concluded that graph theory and matrix approach is applied to various problems of conflicting nature where the quantitative data are not available Paramasivam et al. (2010)

II. RESEARCH METHODOLOGY

The manufacturing units across Indian Manufacturing Industries are continuously trying to update themselves by acquiring or developing new technologies. Mainly the new technologies are not utilized properly due to following technologies acquired only for the image of the company, choosing wrong area for technology up-gradation and overlooking socio-psychological barriers. To demonstrate the proposed methodology for the selection of material handling systems (MHS), a case study approach has been conducted in a Highway industry limited. Five different material handling systems are considered. These systems are selected on the basis of their suitability for particular job, availability cost & layout. The performance of these selected systems depends upon certain parameters. These parameters are called attributes. These attributes are identified for measuring the suitability of the system for a particular time & situation. For measuring the performance of a particular MHS, various attributes such as labor cost, work in process inventory, effect on quality of product, installation and maintenance cost, floor area occupied, flexibility of the system and machine utilization are selected. The methodology employed in the study has been depicted in Figure 1:

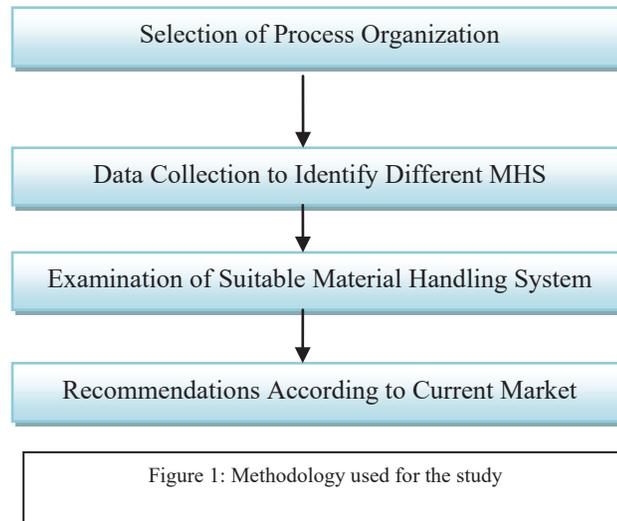

FLEXIBLE MANUFACTURING SYSTEM I (EXISTING SYSTEM)

This is the existing material handling system, used in crank shaft machining line. Presently, material from one machine to another machine is moved manually. At least two tables per machine are used for placing in process material. There are six machines in crank shaft machining line. Four workers are required for moving the material. Sometime dent on the surface and mixing of in process material occurred due to improper handling. The layout of line shows the location of different machines. As the material moves from one machine, it has to be inspected by line inspector. Line inspector after ensuring the quality, allowed the material to move to next operation by placing a green tag in the material. Figure 2: show the layout of the existing system.

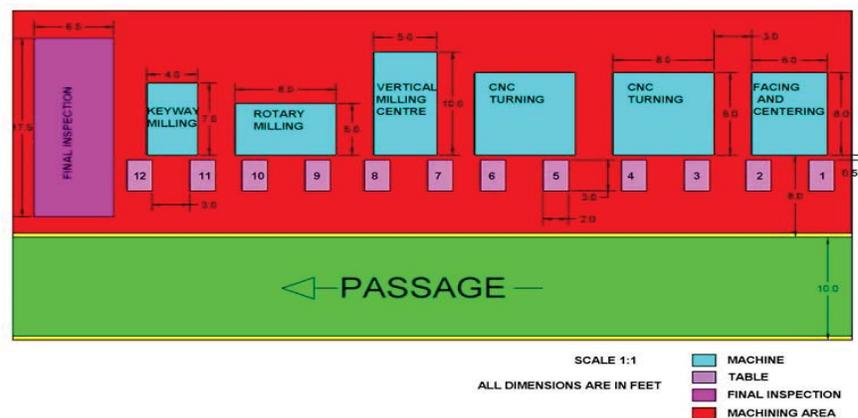


Figure 2: Layout of Existing System FMS I

FLEXIBLE MANUFACTURING SYSTEM II (MODIFIED CONVEYOR SYSTEM)

In this system conveyor or shoots are used for moving the material from one machine to another. A Conveyor is used when a material is moved very frequently between specific points and the path between points is fixed. Conveyors combined with modern identification and recognition systems like bar code technologies have played a significant role in the transportation and sorting of a large variety of products in modern warehouses. Figure 3: show the layout of this system.

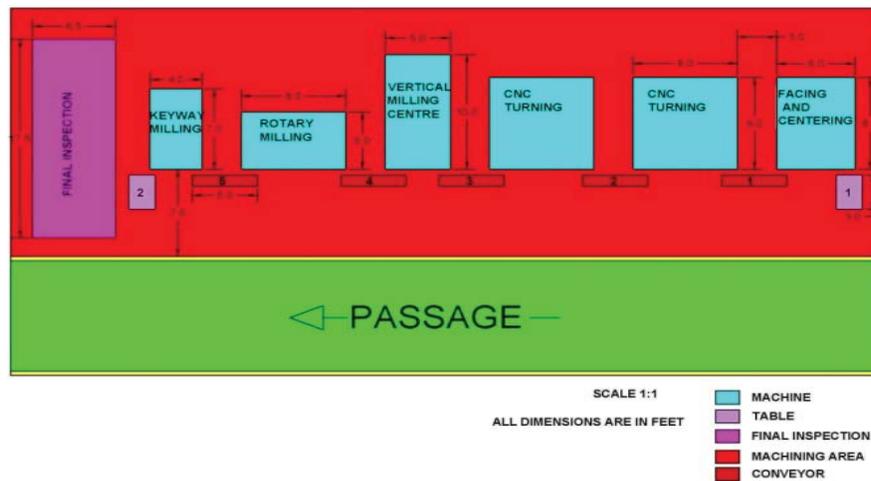


Figure 3: Modified Layout of Conveyor System FMS II

III. DISCUSSION OF RESULTS

In response to the fast alternations in worldwide industrial markets, many manufacturing enterprises have begun to adopt new, innovative ways to manufacture. Compared with the past, customers demand are changing day by day for low-cost, reliable and high- quality products with increasingly shorter and more reliable delivery times (Alvi and Labib, 2001). Since assembly constitutes an important part of most product manufacturing, any improvements to the assembly process are welcomed by the manufacturing enterprises. In order to deal with the continuous production of varying mixtures of products and the quick changes of production requirements in response to the changing demands in the market, the assembly system must have a high degree of flexibility (Arora and Kumar, 2000). In the present research, the important process variables are taken into consideration for the purpose of evaluating numerical index value of material handling system. All these attributes are non- beneficial attributes. Objective values of all such attributes are measured during the experimentation. Table shows the values of all the attributes.

The permanent of this matrix is a FMSSI (Flexible manufacturing system selection index) value. The permanent function contains only positive terms, therefore higher values of A and a_{ij} will result in an increased value of the FMS index value. The various material handling systems can be arranged in descending or ascending order of FMS index value to rank them for the given machining line. These are called the ranking values of the system for the considered machining line. The system for which the value of FMS index value is highest is the best choice for the crank shaft machining line considered. Table1: shows the FMSSI value in descending order. From the above discussion, it can be concluded that FMS II is the suitable system for crank shaft line. If FMS II is replaced with existing system, then, it gives profit after 5th month of installation and three workers per shift are saved. Table:1 shows the installing cost of different systems and their payback period is calculated by comparing considered systems with existing system.

Table 1: FMSSI (Flexible Manufacturing System Selection Index) value.

S No.	Type	FMS Index value	Installation Cost	FMS Index value	Payback Period
1	FMS II	10.3917	87,600/-	10.3917	After 5 th month
2	FMS IV	8.0696	1,15,80,000/-	8.0696	After 963/12 th month
3	FMS I	7.3470	27,600/-	7.3470	-----
4	FMS V	6.36749	65,000/-	6.36749	After 5 th month
5	FMS III	4.7202	5,00,000/-	4.7202	After 60 th month

IV. CONCLUSION

Effective & efficient manufacturing system have positive impact on the firm competitiveness .Application of FMS helps to achieve the objective of the firm for reducing labour & maintenance cost..FMS implementation has shown tremendous improvement as compared to existing system in Highway industry ltd .FMS index value indicates that among studied flexible manufacturing system FMS-II has shown best result followed by FMS-IV and FMS-I on the basics of pay back period FMS-II is ranked 1st followed by FMS-IV ,FMS-I ,FMS-V and FMS-III .This type of study can be applied to evaluate the performance of existing manufacturing of firm under study to recommend better FMS system to improve economically

REFERENCES

- [1] Alvi, A.U. and Labib, A.W. (2001), "Selecting next generation manufacturing paradigms – an analytical hierarchy process based criticality analysis", Proceedings of Institution of Mechanical Engineers, UK – Part B, Vol. 215, No. 3, pp. 1773-1786.
- [2] Arora, S. and Kumar, S. (2000), "Reengineering: a focus on enterprise integration", Interfaces, Vol. 30, No. 5, pp. 54-71. Anand, G., Kodali, R. and Kumar, S.B. (2011),"
- [3] Development of analytic network process for the selection of material handling systems in the design of flexible manufacturing systems (FMS)", Journal of Advances in Management Research, Vol.8, No.1, pp. 123-147.
- [4] Bayazit, O. (2005), "Use of AHP in decision making for flexible manufacturing systems", Journal of Manufacturing Technology Management, Vol. 16, No. 7, pp. 808-819.
- [5] Blackhurst, J., Wu, T. and Gardy, P.O. (2005), "PCDM: a decision support modeling methodology for supply chain product and process design decisions", Journal of Operations Management, Vol. 23, No. 3, pp. 325-343.

- [6] Bourne, M., Kennerley, M. and Franco-Santos, M. (2005), "Managing through measures: a study of impact on performance", *Journal of Manufacturing Technology Management*, Vol. 16, No. 4, pp. 373-395.
- [7] A. M. E. Tamimi, M. H. Abidi, S. H. Mian, J. Aalam, "Analysis of performance measures of flexible manufacturing system", *Journal of King Saud University – Engineering Sciences*, Vol. 24, No. 1, pp. 115-129.
- [8] Buffa, E. (1984), *Meeting the Competitive Challenge*, Dow Jones-Irwin, Homewood, IL.
- [9] Cleveland, G., Schroeder, R. and Anderson, J. (1989), "A theory of production competence", *Decision Sciences*, Vol. 20, No. 5, pp. 655-668.
- [10] Durai Prabhakaran, R.T., Babu, B.J. and Agrawal, V.P. (2006), "Structural modeling and analysis of composite product system: a graph theoretic approach", *Journal of Composite Materials*, Vol. 40, No.22, pp. 1987-2007.
- [11] Darvish, M., Yasaei, M. and Saeedi, A. (2009), "Application of the graph theory and matrix methods to contractor ranking". *International Journal of Project Management*, Vol. 27, No.6, pp.610-619.
- [12] Gandhi, O.P., Agrawal, V.P. and Shishodia, K.S. (1991), "Reliability analysis and evaluation of systems", *Journal of Reliability Engineering & System Safety*, Vol. 32, No.4, pp. 283-305.
- [13] Goyal, S. and Grover, S. (2010), "Fuzzy & graph approach for the selection of advanced manufacturing system investments", *International Journal of Computer Communication and Information System*, Vol. 2, No. 1, pp. 204-210.
- [14] Gershwin, S.B. (1994), *Manufacturing Systems Engineering*, Prentice-Hall, New York, NY.
- [15] Gomes, C.F., Yasin, M.M. and Lisboa, J.V. (2006), "Performance measurement practices in manufacturing firms: an empirical investigation", *Journal of Manufacturing Technology Management*, Vol. 17, No. 2, pp. 144-167.
- [16] Groover, K.P. and Zimmers, E.W. Jr (2000), *CAD/CAM Computer-aided Design and Manufacturing*, Prentice-Hall, Englewood Cliffs, NJ.
- [17] Hamid, U. (2007), "Feature based sequence planning and assembly system design using petri net", PhD Dissertation, Asian Institute of Technology, Bangkok.
- [18] Hassan, M.M.D. (2007), "Toward guiding the selection of a layout procedure", *Journal of Manufacturing Technology Management*, Vol. 18 No. 3, pp. 292-303.
- [19] Hayes, R. and Wheelwright, S. (1984), *Restoring Our Competitive Edge*, Wiley, New York, NY.
- [20] Jain, A., Jain, P.K. and Singh, I.P. (2006), "Performance modeling of FMS with flexible process plans – a petri net approach", *International Journal of Simulation Modeling*, Vol. 5 No. 3, pp. 101-113.
- [21] Jangla, K., Grover, S., Chan, F.T.S., and Aggarwal, A. (2011), "Diagraph and matrix method to evaluate the machinability of tungsten carbide composite with wire EDM", *International Journal of advanced manufacturing Technology*, Vol. 56, No. 9-12, pp.959-974.
- [22] Kadipasaoghi, S.N., Hurly, S.F., Foote, J.L. and Khumawala, B.M. (1998), "An investigation of the relationship between global manufacturing practices and outcomes in machine tools and textile industries", *Journal of Operations Management*, Vol. 16, pp. 291-9.
- [23] Kulkarni, S. (2005), "Graph theory and matrix approach for performance evaluation of TQM in Indian industries", *Emerald Group Publishing Limited*, Vol.17, No.6, pp.509-526.
- [24] Kaveh, A. and Koohestani, K. (2007), "An efficient graph theoretical method for plate bending finite element analysis via force method", *Emerald Group Publishing Limited*, Vol.24, Iss.24, pp.679-698.